

Approved with condition vide No. PHC/Chimbel/Const./ 2021-2020  
Date: 12-11-21

This drawing is the property of the Architect and should not be copied, traced, reproduced or issued under RTI Act to another person unless prior permission from the Architect is obtained.


Medical Officer in Charge  
Primary Health Centre  
Chimbel

APPROVED FROM PLANNING POINT  
SUBJECT TO CONDITIONS GIVEN  
VIDE ORDER NO: GPPDA/460/HAL/809/2020  
DATED 16 DEC 2020

MEMBER SECRETARY  
Greater Panaji  
Planning & Dev. Authority,  
Panaji- Goa

Meeting held on 29/12/2022  
under resolution No. 213 subless  
conditions as per permission  
No. VP/TLG/Const-10/45/20-21/3443  
19/02/2021

PETER MARTINS  
Secretary  
Village Panchayat of Taloigao

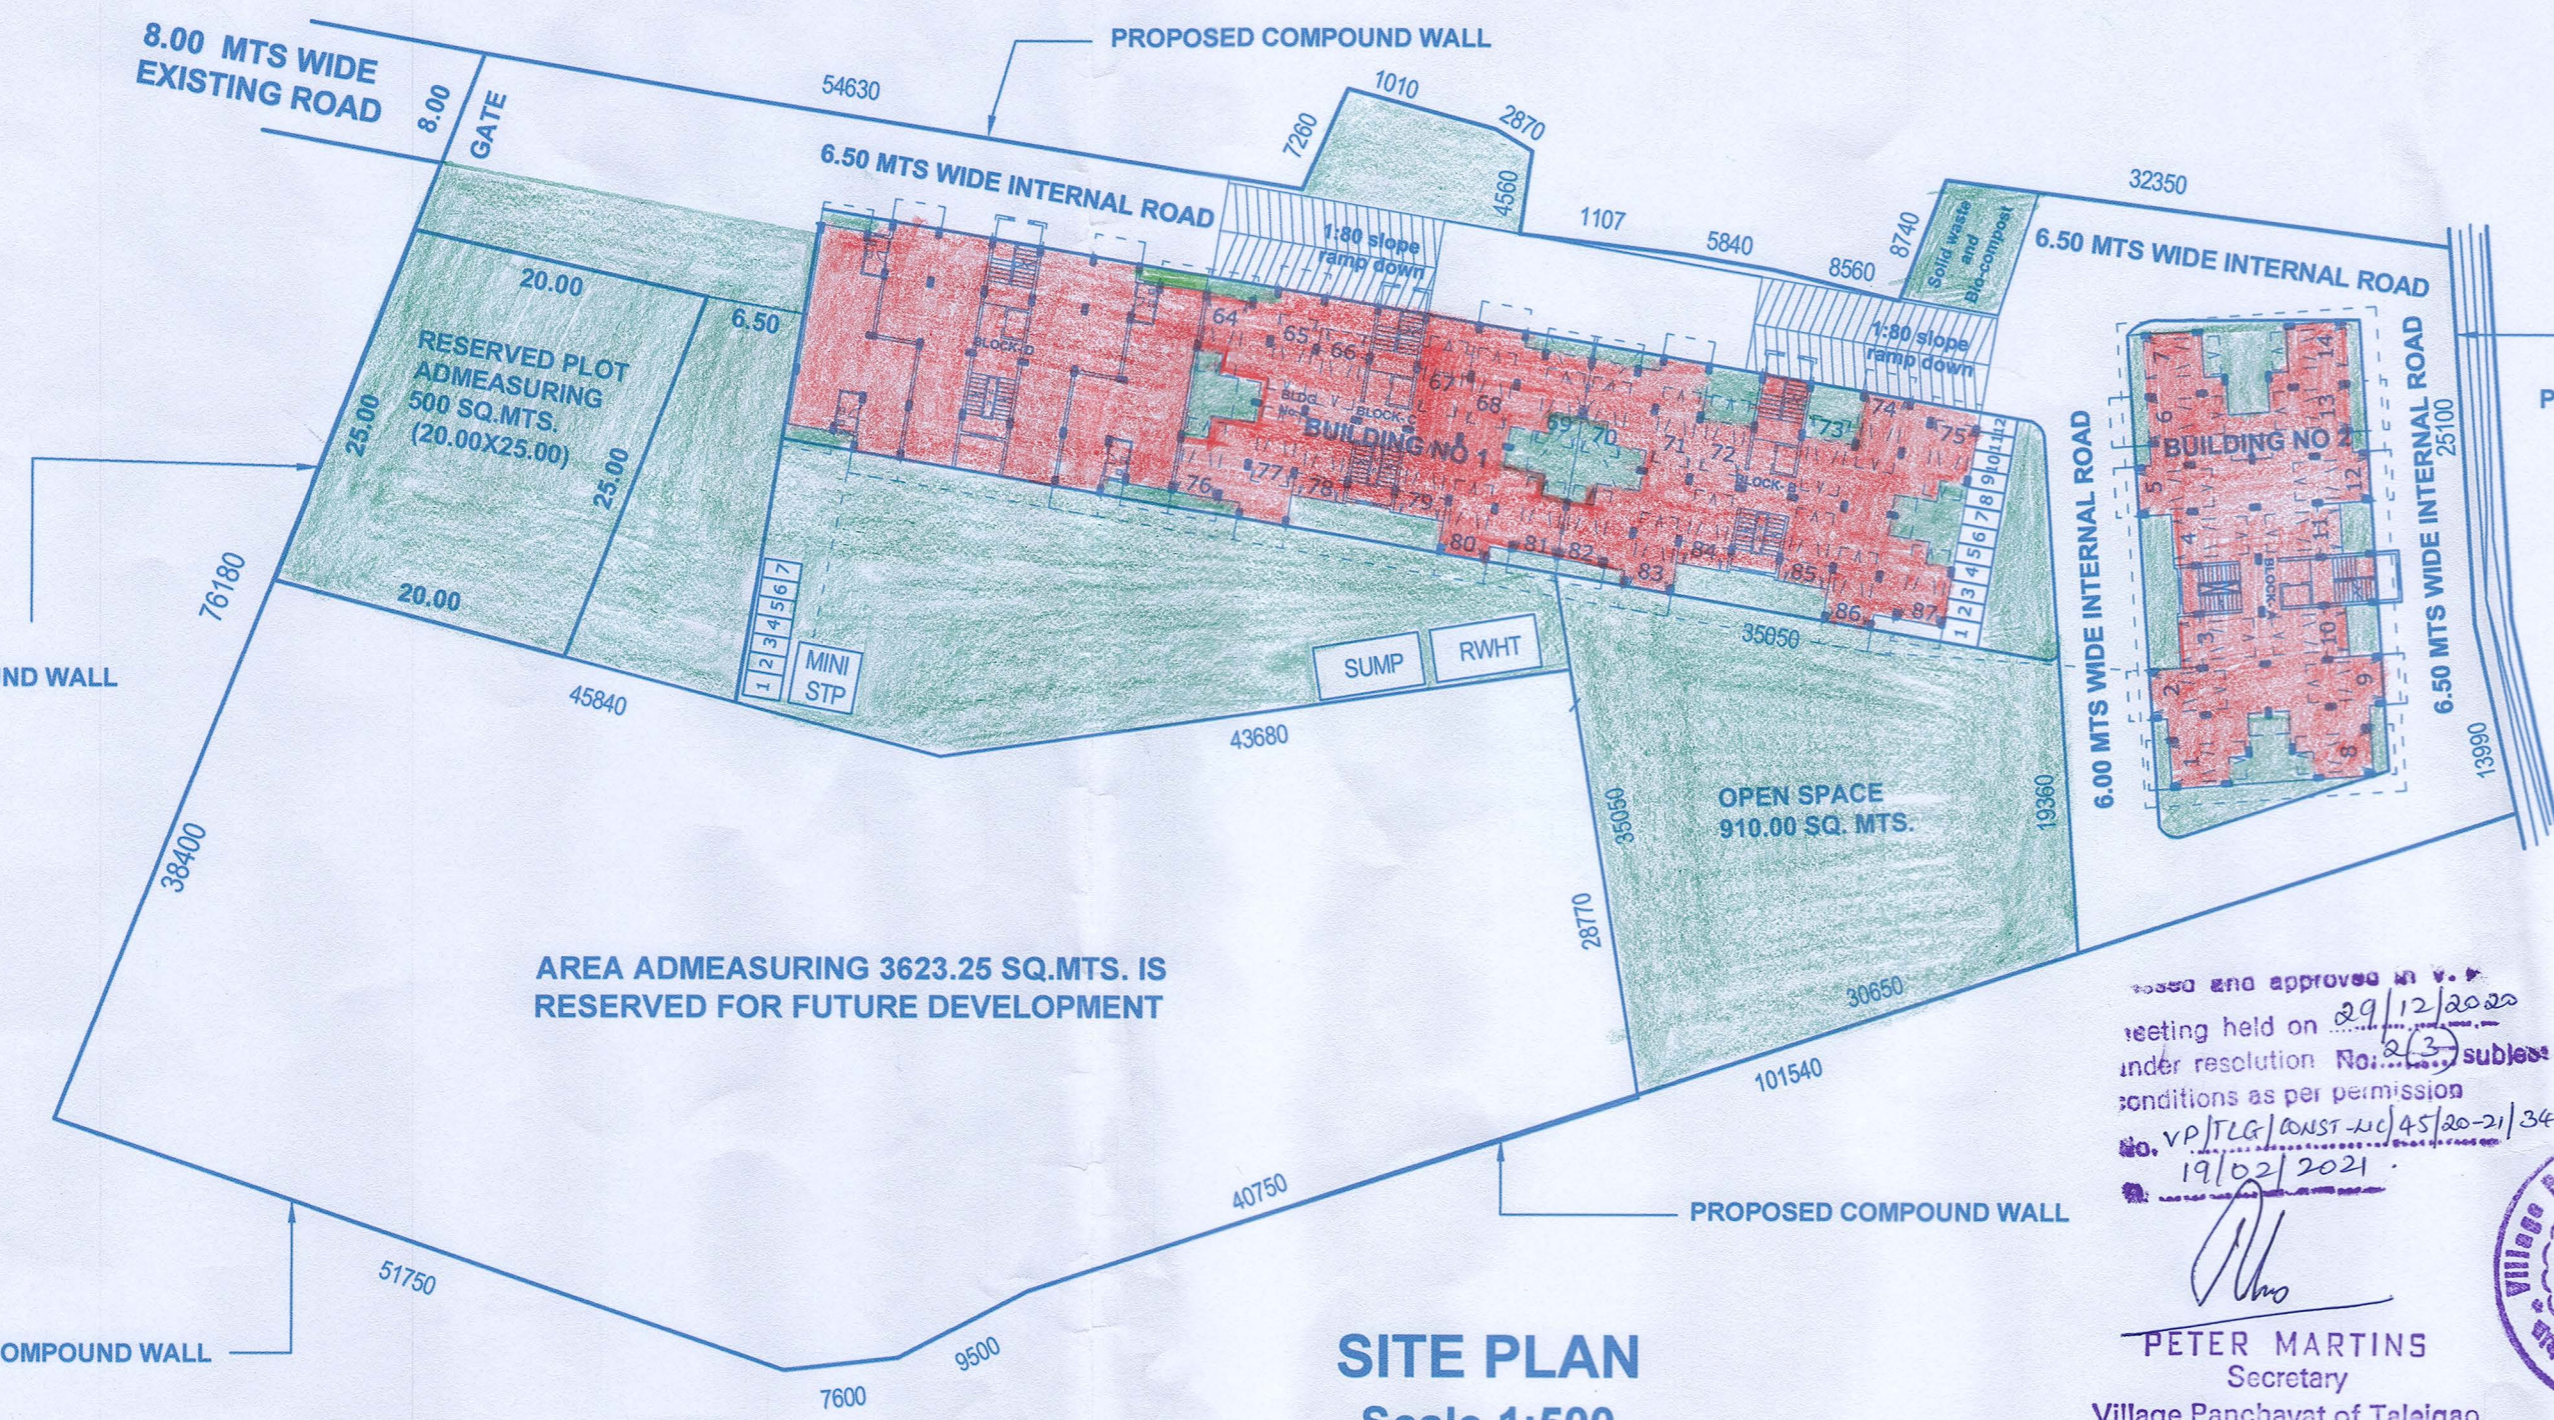

AREA ADMEASURING 3623.25 SQ.MTS. IS RESERVED FOR FUTURE DEVELOPMENT

**SITE PLAN**  
Scale 1:500



	FLOOR REF	USE	TOTAL B.U.A (J+K)	AREAS FREE FROM F.A.R									TOTAL (J) (A+B+C+D+E+F+G+H+I)	NET FLOOR AREA (F.A.R) (K)
				BAL (A)	STAIR CASE (B)	LIFT (C)	INTERMEDIATE TERRACE (D)	PARKING (E)	UTILITY (F)	7.5% Ar. FREE (G)	POOL (H)	RAMP (I)		
BUILDING 1	ALL FLOORS	RESIDENTIAL /COMMERCIAL	12250.49	1593.90	1154.55	7.29	837.88	2543.46	39.15	-	-	-	6176.23	6074.26
BUILDING 2	ALL FLOORS	RESIDENTIAL	3947.95	651.36	362.89	2.43	283.92	316.63	-	-	-	-	1617.23	2330.72
TOTAL	ALL FLOORS	RESIDENTIAL /COMMERCIAL	16198.44	2245.26	1517.44	9.72	1121.80	2860.09	39.15	-	-	-	7793.46	8404.98

PROJECT :  
PROPOSED CONSTRUCTION OF COMMERCIAL & RESIDENTIAL BUILDINGS ON PLOT BEARING SURVEY.NO 110/5 SITUATED AT TONCA PANAJI GOA.

SECTIONS, AREA CALCULATIONS AND ELEVATION

STATUS : SUBMISSION DRAWING

BUILDING 4  
DATE :  
SCALE : 1:500

OWNER  
M/S PRIORITY CONSTRUCTIONS.

ARCHITECT/ENGINEER  
Drashant Y. Karapurkar  
C. Engineer  
Reg. No. EA/6022/2011

AREA STATEMENT	
PLOT AREA	= 9662.00 Sq.m
AREA RESERVED FOR FUTURE DEVELOPMENT	= 3623.25 Sq.m.
AREA OF ROAD WIDENING	= NIL Sq.m.
EFFECTIVE PLOT AREA FOR DEVELOPMENT	= 6038.25 Sq.m
PERMISSIBLE COVERAGE	= 40%
PERMISSIBLE COVERED AREA	=2415.30 Sq.m.
PROPOSED COVERED AREA	= BUILDING 1 = 1111.02 Sq.m. = BUILDING 2 = 355.63 Sq.m.
TOTAL PROPOSED COVERED AREA	= 1466.65 Sq.m.
PROPOSED COVERAGE	= 22.29 %
PERMISSIBLE F.A.R.	= 200 %
PERMISSIBLE FLOOR AREA	= 12076.50 SQ.M
PROPOSED FLOOR AREA	= BUILDING 1 = 6074.26 Sq.m. = BUILDING 2 = 2330.72 Sq.m.
TOTAL PROPOSED FLOOR AREA	= 8404.98 Sq.m.
TOTAL F.A.R CONSUMED	=139.19 %
PERMISSIBLE 7.5% FREE OF F.A.R OF THE FLOOR AREA	= 937.63 Sq.mts
PROPOSED 7.5% FREE OF F.A.R OF THE FLOOR AREA	= NIL
REQUIRED OPEN SPACE	= 905.73 Sq.m
OPEN SPACE PROVIDED	= 910.00 Sq.m
PARKING REQUIREMENT	1) Commercial = 337.14 sq.m @ 1 car for 50 sq.m = 6.75 Cars 2) Residential = 8067.84sq.m @ 1 car for 75 sq.m = 107.57.Cars Total Car parking required = 114.32 Nos.....Say ...115 Nos. 3 ) Parking provided : BUILDING 1 = 87 nos BUILDING 2 = 14 nos Area reserved for PARKING =19 nos Provided TOTAL = 120 nos